

Features

Ultimate "Home Cinema" projection screen for circumstances in which several aspect ratios are required or desired.

Revolutionary, unique, horizontal masking system with constant centre projection surface, irrespective of the selected aspect ratio.

Automatic choice of video (4:3), HDTV (16:9) or cinemascope (2.35:1) format.

Selected aspect ratio is automatically accompanied by the black border all around which increases the perceived clarity of the projected image.

After rolling up, the black door elegantly closes the case.


Built-in infrared remote control

Quiet, fast motor with 5-year guarantee and CE quality mark.

Supplied brackets for wall or ceiling can be mounted at variable distances.

Options




- Screen fabrics Matte White S, and High Contrast S.

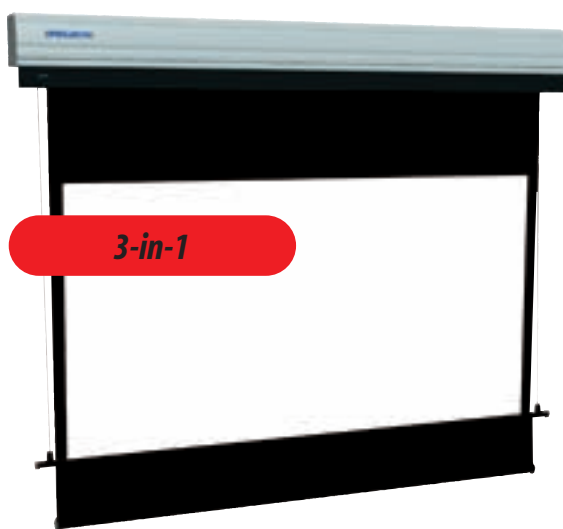

- ▲ Top quality, electrically operated projection screen with automatic adjustment to 3 desired aspect ratios. Very suitable for Home Cinema.

Technical characteristics

- ▶ Projecta products satisfy the strictest quality and safety requirements in Europe and are CE approved.
- ▶ Projecta ensures that the quality of its products are monitored by the TÜV/GS programme.
- ▶ Aluminium case with an integrated mounting system and a black door on the bottom.
- ▶ Horizontal masking system patented by Projecta BV.
- ▶ Matte White S: double-sided laminated vinyl on a woven fiberglass carrier with black backing; gain 1.0 and viewing angle 50° L/R.
- ▶ High Contrast S: double-sided coated grey vinyl on a woven fiberglass carrier with black backing; gain 1.0 and viewing angle 45° L/R.
- ▶ Projection screen fabrics satisfy the requirements for fire resistance of construction materials and components.
- ▶ Roll/re-roll programmed standard for video (4:3), HDTV (16:9) and cinemascope (2.35:1) formats.
- ▶ Extra desired aspect ratio freely programmable.
- ▶ Projection screen fabric has a black border of 5 cm on left and right sides and a black border on the top and bottom (height depends on the image ratio).
- ▶ All electrical projection screens satisfy the following product safety standards: IEC 60335-1; 60335-2; DIN19045-5 and IEC 61000 for Electro Magnetic Compatibility.
- ▶ Somfy motor with 32 RPM (revolutions per minute) and 90 Watts.
- ▶ Infrared remote control compatible with universally programmable remote controls.
- ▶ With special bracket for easy mounting on wall or ceiling.

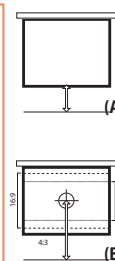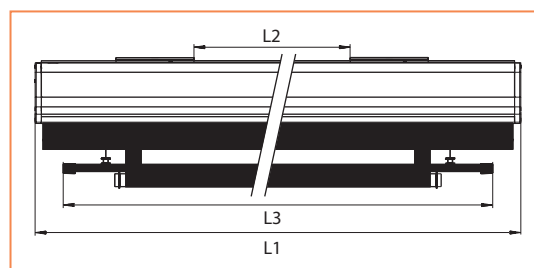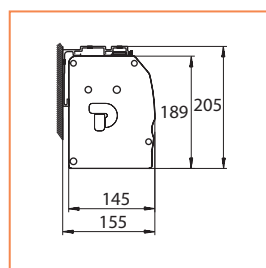

Aspect ratio	Screen width in cm	Viewing sizes			Case			Net weight in kg	Up/down in sec.	Screen fabrics		(A) Bottom surface in cm*	(B) Centre surface in cm*
		4:3	16:9	1:2,35	L1	L2	L3			Matte White S prod. code	High Contrast S prod. code		
	160	110x146	82x146	62x146	1787	700	1715	20	37	10100500	10100504	90	145
	180	126x168	94x168	71x168	2007	900	1935	22	37,5	10100501	10100505	90	153
	200	143x190	107x190	81x190	2227	1100	2155	24	38	10100502	10100506	89	160
	240	173x230	129x230	98x230	2627	1500	2555	31	41	10100503	10100507	78	164

(*) Measured from the floor when mounted at a height of 2.8 metres. The diagonal sizes listed are approximate in accordance with the market standard. For advice regarding the right size and screen fabric see page 4-6 or consult the Screen Selector at www.projectascreens.com.