

Present with ESP
– short distance, big picture!



- ESP (Extreme Short throw Projector)
- Windows Vista™ Network (WLAN und LAN)
- BrilliantColor™ und NCE 4™




DLP® and the DLP logo are registered trademarks of Texas Instruments and Brilliant Color™ is a trademark of Texas Instruments. NCE 4™: Colour optimization by Toshiba for ESP projectors.



Display	0.55" DMD™ Chip
Resolution	XGA 1,024 x 768
Brightness	2,300 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	2,000:1
Projection format	4:3 switchable to 16:9, 16:10 (compr.)
Lamp	275 W (TLPLW15LAMP)
Maximal lamp life	up to max. 2,000 hours / up to max. 3,000 hours in ECO mode
Lens	F = 2.6 / f = 8.37, manual focus
Zoom	-
Frequency (hor. / vertical)	15 - 120 kHz/50 - 150 Hz
Projection	front, rear and ceiling
Digital keystone correction	auto vertical +/- 18°
Picture size (diagonal)	0.89 - 2.54 m
Projection distance	0.5 - 1.5 m
Input signals	NTSC/PAL/SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA, SVGA, XGA, SXGA, WXGA & UXGA (compr.) SVGA, XGA, SXGA & UXGA (compr.)
Inputs	2 x RGB (D-sub 15), RJ45, S-video, composite video, audio (stereo mini jack), audio (2 x RCA L/R), component (Y/P _B /P _R) via D-sub 15

Outputs	RGB (D-sub 15), audio (stereo mini jack)
Serial interface	RS-232C (D-sub 9pin)
Power supply	AC 100 - 240 V, 50/60 Hz
Loudspeaker	1 W mono
Dimensions (W x H x D)	337 x 118 x 265 mm
Weight	4.2 kg
Operation noise	normal 33 / ECO mode 28 dB
Specials	Windows Vista™ Network (WLAN and LAN), USB, password, panellock, digital zoom, user logo, DDC compatible, BrilliantColor™
Accessories	remote control with laserpointer and batteries, owners manual (CD ROM), quick reference, RGB and power-cable, softcase
Options	ceiling mount, spare lamp, camera c001
Menu guidance	22 languages (EN, FR, DE, IT, ES, PT, RU, SV, TR, PL, DA, CS, HU, NL, FI, NO, EL, RO, JA, ID, ZH, KO)

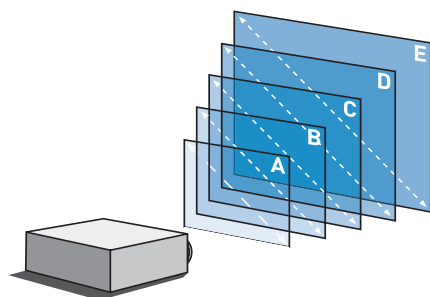

Picture size	Projection distance
A 0.89 m	0.50 m
B 1.20 m	0.69 m
C 1.50 m	0.87 m
D 2.00 m	1.16 m
E 2.54 m	1.50 m

