

The bright business allrounder.




- security-function protects from improper use (pincode and panellock)
- Due to multiple inputs sperfect for conferencing and fixed installation
- tw355: WLAN capable with WLAN USB card (IEEE802.11b/g), PC card slot and LAN capable (RJ45)





Display	0.7" DMD™ Chip
Resolution	XGA 1,024 x 768 (SXGA/UXGA compr.)
Brightness	3,500 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	2,000:1
Projection format	4:3 switchable to 16:9
Lamp	300 W (TLPLW14LAMP)
Max. lamp life	up to max. 2,000 hours / up to max. 3,000 hours in ECO mode
Lens	F = 2.4 - 2.6 / f = 23 - 27.6 mm, manual zoom and focus tw355: F = 2.4 - 3.0 / f = 21 - 31.5 mm, power zoom and auto focus
Zoom	1.2 x, tw355: 1.5 x
Frequency (hor./vertical)	15 - 120 kHz/30 - 150 Hz
Projection	front, rear and ceiling
Digital keyst. correction	auto vertical/horizontal
Picture size (diagonal)	0.85 - 7.62 m, tw355: 1.0 - 7.62 m
Projection distance	1.3 - 12.1 m, tw355: 1.2 - 13.8 m
Input signals	NTSC/PAL/SECAM, 480i, 480p, 576i, 576p, 720p, 1.080i, VGA, SVGA, XGA, SXGA & UXGA (compr.)
Inputs	DVI, 2 x RGB (D-sub 15), component video (1 x BNC), 2 x audio (RCA L/R),

Outputs	1 x S-video, composite video (RCA), 3 x audio stereo mini jack, tw355: USB RGB (D-sub 15), audio (stereo mini jack)
Serial interface	RS-232C (mini DIN8 pin), LAN (RJ45)
Power supply	AC 100 - 240 V, 50/60 Hz
Loudspeaker	2 x 4 W stereo
Dimensions (W x H x D)	340 x 115 x 314 mm, tw355: 340 x 115 x 328 mm
Weight	4.9 kg, tw355: 5.5 kg
operation noise	normal 34 dB / ECO mode 28 dB
Specials	easy setup, security-function, black board-function, user logo capture, NCE 2, picture-in-picture-function, split- screen-function, tw355: USB, pc card slot
Accessories	remote control with laserpointer and batteries, owners manual (CD ROM), quick reference, RGB und power-cable, softcase
Options	ceiling mounting, trolley, spare lamp, camera c001
Wireless communication	tw355: WLAN capable with WLAN USB card, Wireless LAN (IEEE802.11b/g), 64/128 bit encoding, wep+

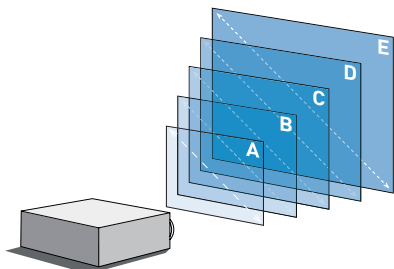

Picture size	Projection distance
A 0.76 m	1.30 m
B 1.50 m	1.90 - 2.40 m
C 2.50 m	3.30 - 4.00 m
D 5.00 m	6.60 - 8.00 m
E 7.62 m	9.90 - 12.00 m

