

## Features

**Sturdy steel case with fast, quiet motor.**

**High quality projection screen fabric results in flat hanging screen for optimum image quality.**

**Automatic stop for extending and retracting guarantees long lifespan of projection screen fabric.**

**Pre programmed mechanical fine tuning of the extending/retracting of the projection screen fabric facilitates rapid installation.**

**Quiet fast motor with 5-year guarantee and CE quality mark.**

**Direct, easy to mount via supplied wall/ceiling brackets.**

## Options

- ▶ Screen fabrics Matte White M and Datalux M.
- ▶ Available with a 5-cm black border all around for increased perceived clarity.

## Accessories (see pages 72-73)

### For mounting

- ▶ Extra ceiling brackets for use in high rooms 10800004 length max. 100 cm
- ▶ Wall brackets 10800008 length 40 cm
- ▶ Wall clamps 10800007

### For operation

- ▶ Infrared remote control (IR) 10800058
- ▶ Radio frequency remote control (RF) 10800055
- ▶ Key switch 10800009

### Screen Designer



With the Screen Designer, Projecta helps you to determine the perfect custom solution.



- ▶ **Large image projection screens available in 2 heavy duty screen fabrics in widths from 3.5 to 5 metres.**

## Technical characteristics

- ▶ Projecta products satisfy the strictest quality and safety requirements in Europe and are CE approved.
- ▶ Projecta ensures that the quality of its products are monitored by the TÜV/GS programme.
- ▶ Case of steel with galvanised interior and white powder coated exterior (RAL 9016).
- ▶ Matte White M : double-sided calendered vinyl on a non woven fiberglass carrier with black backing; gain 1.0 and viewing angle 50° L/R (B1).
- ▶ Datalux M : double-sided calendered vinyl on a non woven fiberglass carrier with black backing; high gain 1.5 and viewing angle 35° L/R.
- ▶ Available with a 5-cm black border which increases the perceived clarity of the projected image.
- ▶ Screen fabrics satisfy the requirements for fire resistance of construction materials and components.
- ▶ All electrical projection screens satisfy the following product safety standards: IEC 60335-1; IEC 60335-2; DIN 19045-5 and IEC 61000 for Electro Magnetic Compatibility.
- ▶ Somfy motor with 17 RPM (revolutions per minute) and 240 Watts. Motor is mounted on the left. Motor with 5 years guarantee.
- ▶ Motor equipped with electric brake to prevent unwanted roll out and thermal overload cut-out.
- ▶ Supplied complete with 3-metre connection cable and separate wall switch (CE quality mark).

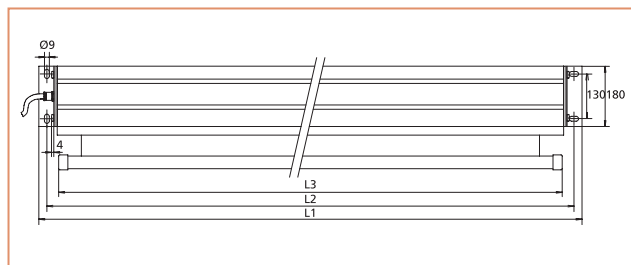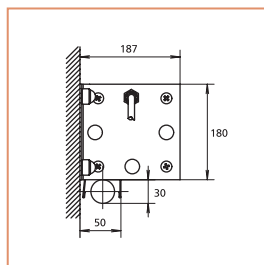

Screen size h x w cm	Viewing size without border h x w cm	Viewing size with border h x w cm	Case			Net weight in kg	Up/down in sec.	Screen fabrics			
			L1 mm	L2 mm	L3 mm			Matte White M		Datalux M	
								without border	with border	without border	with border
350x350	350x350	340x340	3674	3644	3580	71	33	10100300	10100310	10100301	10100311
300x400	300x400	290x390	4174	4144	4080	78	28	10100302	10100312	10100303	10100313
350x400	350x400	340x390	4174	4144	4080	81	33	10100320	10100322	10100321	10100323
400x400	400x400	390x390	4174	4144	4080	84	37	10100304	10100314	10100305	10100315
350x450	350x450	340x440	4674	4644	4580	90	33	10100306	10100316	10100307	10100317
365x500	365x500	355x490	5174	5144	5080	100	34	10100308	10100318	10100309	10100319