

## Features

Easy mounting on wall, ceiling and/or in cove via integrated hanging brackets.

Compact case with motor.

Automatic stop for extending and re-tracting guarantees long lifespan of projection screen fabric.

Black border increases perceived clarity of projected image.

## Options

- ▶ Screen fabrics Matte White S, High Contrast S and Datalux S.
- ▶ Formats square (1:1) and video (4:3) and HDTV (16:9).
- ▶ See also the Compact RF Electrol with built-in radio frequency remote control.

## Accessories

(see pages 16-17 and 72-73)

### Accessories for mounting

- ▶ Ceiling brackets  
10800002 max. 100 cm long
- ▶ Wall brackets  
10800001 75 cm long  
10800041 30 cm long
- ▶ Wall clamps  
10800006
- ▶ Bracket kit for easy mounting in soffit.  
10800089

### For operation

- 10800009 Key switch
- 10800055 Easy Install RF remote control
- 10800058 Easy Install IR remote control
- 10800068 Easy Install plug & play relaybox with dry contacts



For more Easy Install detailed information, see pages 16-17.



- ▶ **Electrically operated projection screen available in all common sizes and two aspect ratios and screen fabric types.**

## Technical characteristics

- ▶ Projecta products satisfy the strictest quality and safety requirements in Europe and are CE approved.
- ▶ Projecta ensures that the quality of its products are monitored by the TÜV/GS programme.
- ▶ Steel case with galvanised inner side and white powder coated outside (RAL 9016).
- ▶ Matte White S: double-sided laminated vinyl on a woven fiberglass carrier with black backing; gain 1.0 and viewing angle 50° L/R.
- ▶ High Contrast S: double-sided coated grey vinyl on a woven fiberglass support with black backing; gain 1.0 and viewing angle 45° L/R.
- ▶ Datalux S: double-sided laminated vinyl on a woven fiberglass carrier with black backing; increased gain 1.5 and viewing angle 35° L/R.
- ▶ Projection screen fabric(s) satisfy the requirements for fire resistance of construction materials and components.
- ▶ Square format (1:1) has a 2.5-cm black border on left/right side.
- ▶ Video (4:3) and HDTV (16:9) formats have a 2.5 cm black border on left/right side.
- ▶ All electrical projection screens satisfy the following product safety standards: IEC 60335-1; 60335-2; DIN19045-5 and IEC 61000 for Electro Magnetic Compatibility.
- ▶ Somfy motor with 5-year guarantee and CE quality mark with 17 RPM (revolutions per minute) and 90 Watts.
- ▶ Supplied complete with 3-metre connection cable and separate wall switch (CE quality mark).

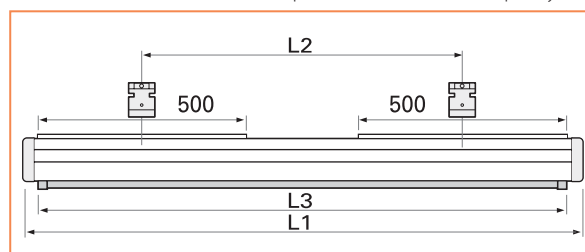

Aspect ratio	Screen size hwxw cm	Viewing size hwxw cm	Nominal diagonal		Case			Net weight in kg	Up/down in sec.	Screen fabrics		
			cm	inches	L1 mm	L2 mm	L3 mm			Matte White S prod.code	High Contrast S prod.code	Datalux S prod.code
1:1	160x160	151x151			1714	1534	1620	10	27	10100070		10100079
	180x180	173x173			1914	1734	1820	12	31	10100071		10100080
	200x200	195x195			2134	1954	2040	14	34	10100072		10100081
	240x240	230x230			2534	2354	2440	18	40	10100076		10100082
4:3	123x160	110x146	183	72	1714	1534	1620	10	21	10100073	10100089	10100083
	138x180	126x168	213	84	1914	1734	1820	12	24	10100074	10100090	10100084
	153x200	143x190	254	100	2134	1954	2040	14	26	10100075	10100091	10100085
	183x240	173x230	305	120	2534	2354	2440	18	31	10100077	10100092	10100086
	213x280	203x270	355	140	2934	2754	2840	22	36	10100078		
	228x300	218x290	381	150	3134	2954	3040	24	39	10100087		
16:9	90x160	82x146	165	65	1714	1534	1620	10	16	10100160	10101161	10101162
	102x180	95x168	208	82	1914	1734	1820	12	18	10101163	10101164	10101165
	117x200	107x190	234	92	2134	1954	2040	14	20	10101166	10101167	10101168
	139x240	129x230	269	106	2534	2354	2440	18	24	10101169	10101170	10101171
	162x280	152x270	302	119	2934	2754	2840	22	28	10101172		
	173x300	163x290	338	133	3134	2954	3040	24	30	10101173		